


Photometric Mapping: R-6321 Elysium Lighted Bollard

PRODUCT SPECIFICATIONS:

Light Type	Lighting Colour (K)	Luminous Flux (lumens)	B. U. G. Rating
LED	4000	63.5	B0-U2-G0

POLAR PLOT OF CANDELA:

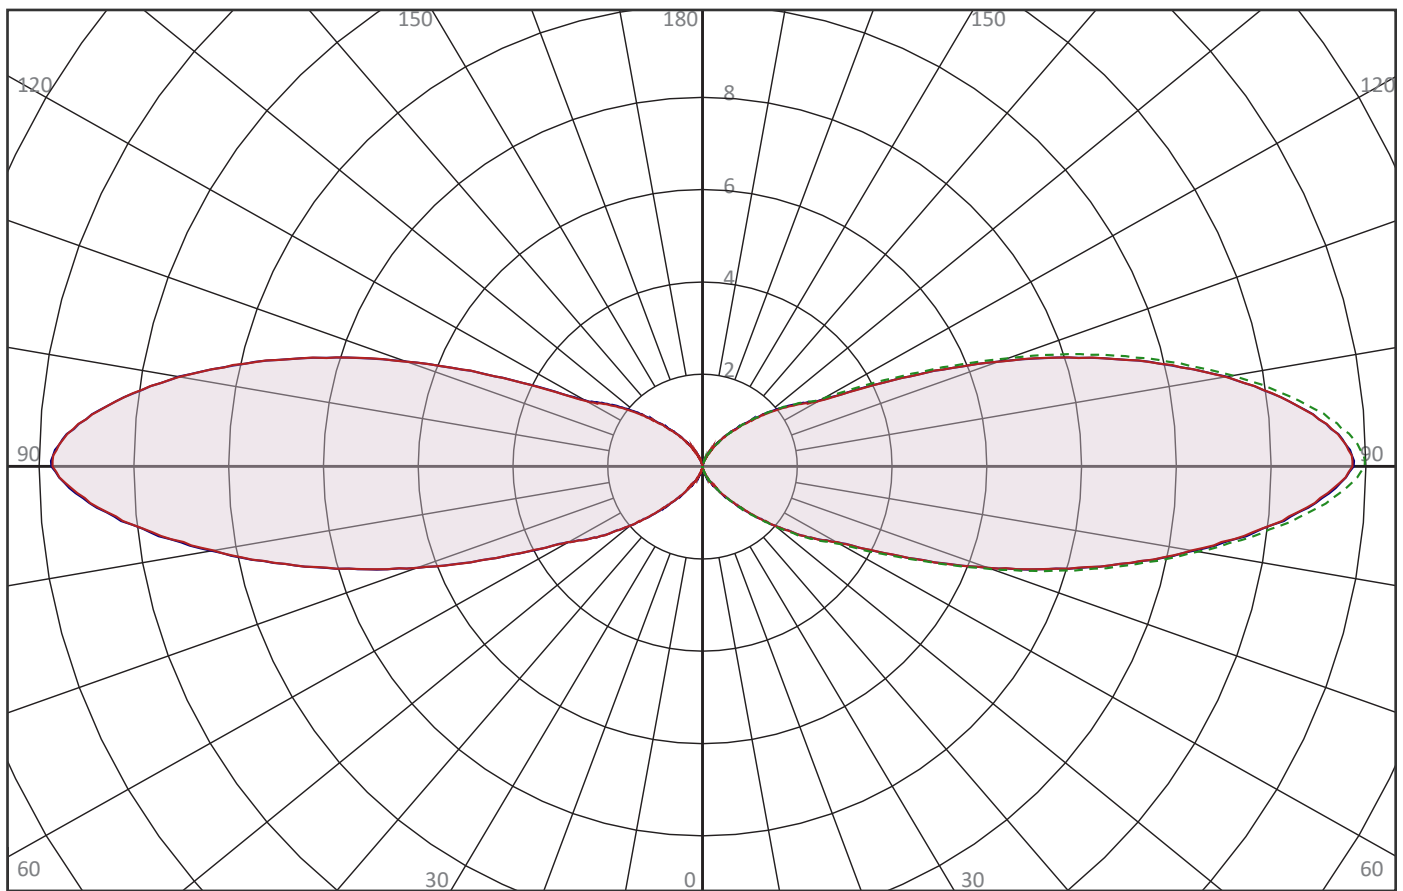


----- 90 and 270 Degree Lateral Plane

----- Plane Through Maximum Cd

----- 0 and 180 Degree Lateral Plane

Photometric Mapping: R-6321 Elysium Lighted Bollard

ISO-ILLUMINANCE PLOT:

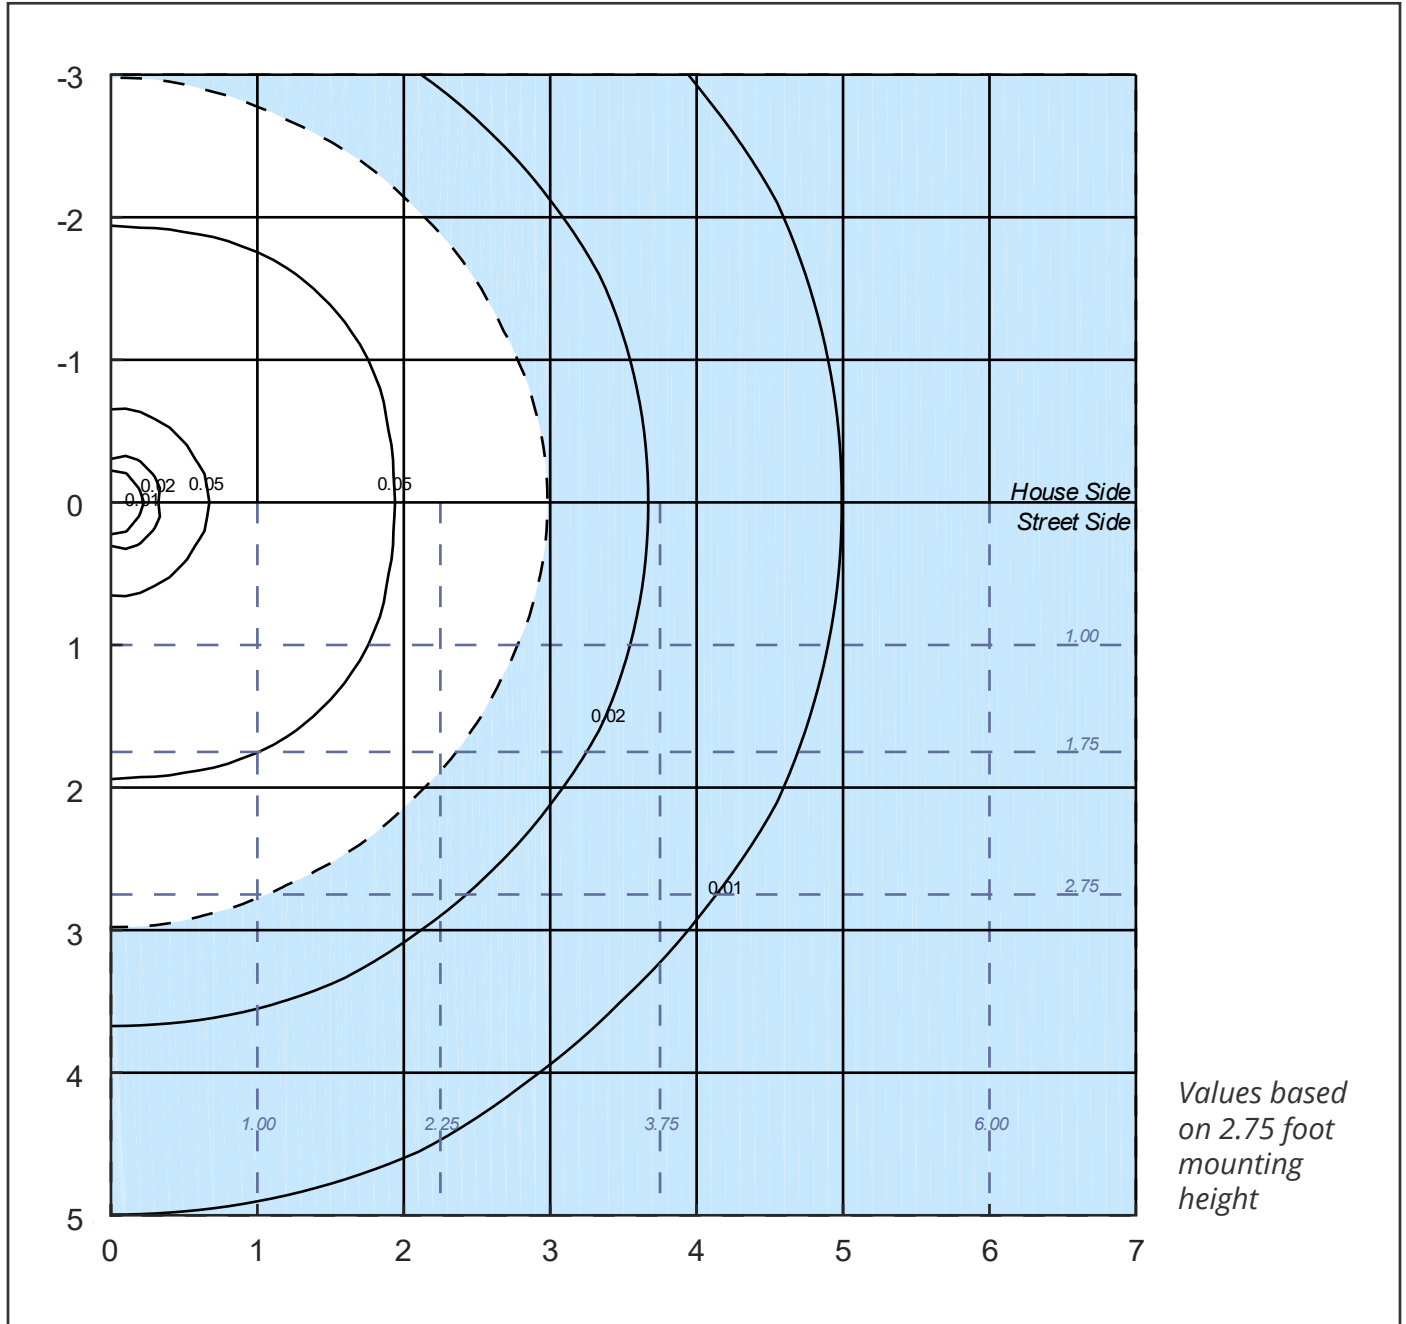

The isofootcandle values shown in the plot above are based on a mounting height of $h = 2.8$ feet. Grid values show multiples of mounting height. The isoilluminance contour lines are expressed in units of footcandles. The values expressed are based on the direct light from a single unit without the contribution of room reflections.