Bollard Post, Model R-7902

Removable Receiver with Lid (for detail, see sheet 2 of 8) Removable Receiver with Chain (for detail, see sheet 3 of 8)

Fixed Embedded Mount (for detail, see sheet 4 of 8)

Flanged Surface Mount (for detail, see sheet 5 of 8)

Fold Down Mount (for detail, see sheet 6 of 8) Removable Shallow Mount (for detail, see sheet 7 of 8)

> be finished in one of seven different powder-coated color options and it is kept in stock, available to ship immediately. For more information on bollard post installation, please visit: www.reliance-foundry.com/bollard/installlation-bollards

Specifications:

Height Above Grade: 36" [914]

General Description:

Make a pronounced statement on entry to your

steel bollard. A staple of the product line, it will

style. It can be embedded in new concrete or

streetscape, business, park, school or stadium with the

contemporary and practical design of the model R-7902

complement the aesthetics of almost any architectural

access needs fluctuate, it can also be installed with

surface-mounted on existing concrete. For locations where

removable or fold down mountings. The model R-7902 can

Diameter: 4 5/16" [110]

Weight: 31 lbs [14kg] (Bollard Post Full Length)

Material: Steel (ASTM A36)


Finish Options:

✓ Polyester Powdercoated See Reliance Foundry's standard color options at www.reliance-foundry.com/bollard/colors-bollards

Mount Options:

- O Removable Receiver with Lid (see sheet 2 of 8)
- O Removable Receiver with Chain (see sheet 3 of 8)
- O Fixed Embedded Mount (see sheet 4 of 8)
- O Flanged Surface Mount (see sheet 5 of 8)
- O Fold Down Mount (see sheet 6 of 8)
- O Removable Shallow Mount (see sheet 7 of 8)
- Optional Chain Accessory (see sheet 8 of 8)



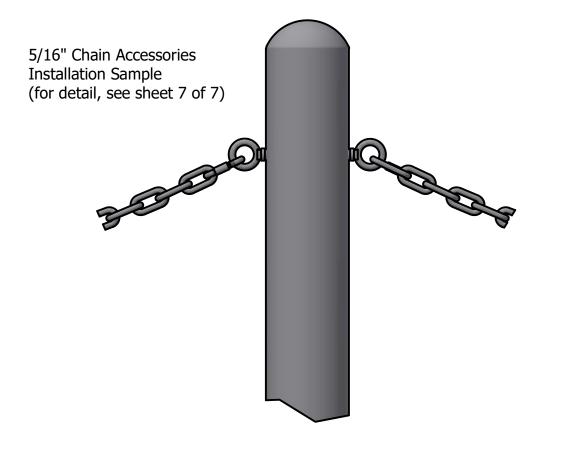


Optional Chain Accessories Available



Chain Eye 3/8" (Powder Coated)



Quick Link Connector (Powder Coated)



Bollard Chain 5/16" (Powder Coated)






Unit 207, 6450 - 148 Street, Surrey, BC V3S 7G7, Canada 1-888-735-5680 info@reliance-foundry.com www.reliance-foundry.com

TITLE


Bollard Post, Model R-7902

SIZE	≣		DWG NO				REV
С			R-7902_	Public			A04
UNLES			OTHERWISE S				
NOT TO	SCALE	DIMS A	RE IN INCHES	[MILLIMETERS]	SHEET 1	OF 8	

THIS PLAN DRAWING AND DESIGN ARE, AND AT ALL TIMES REMAIN, THE EXCLUSIVE PROPERTY OF RELIANCE FOUNDRY CO. LTD.

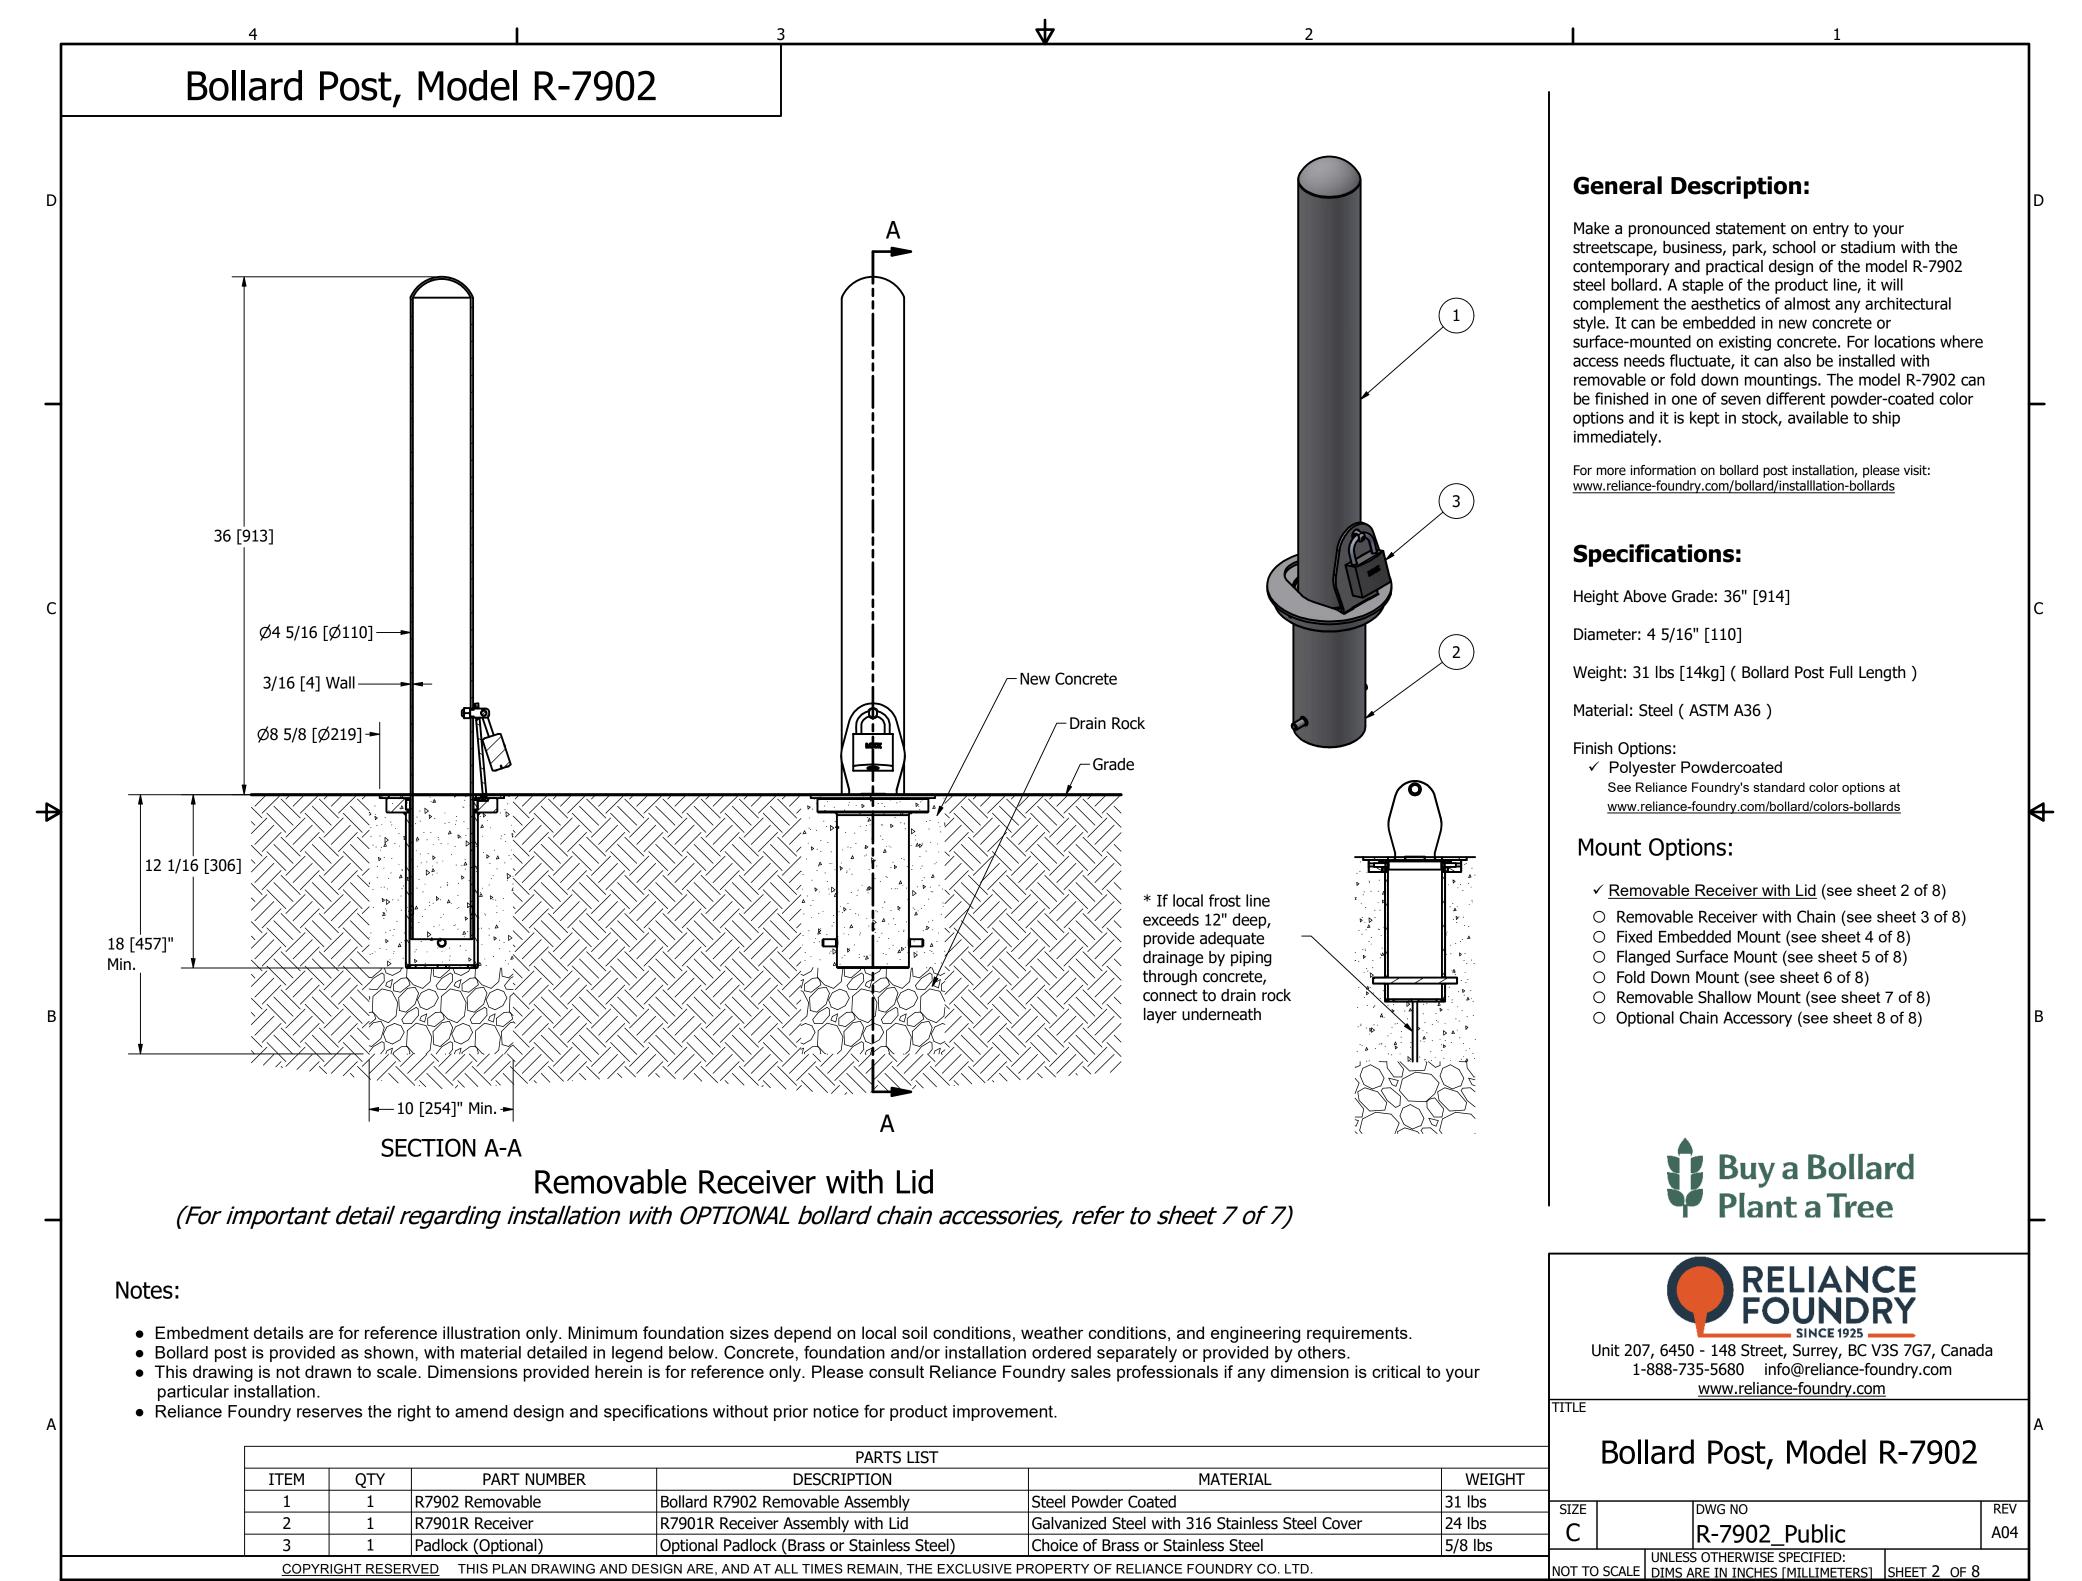

4 2

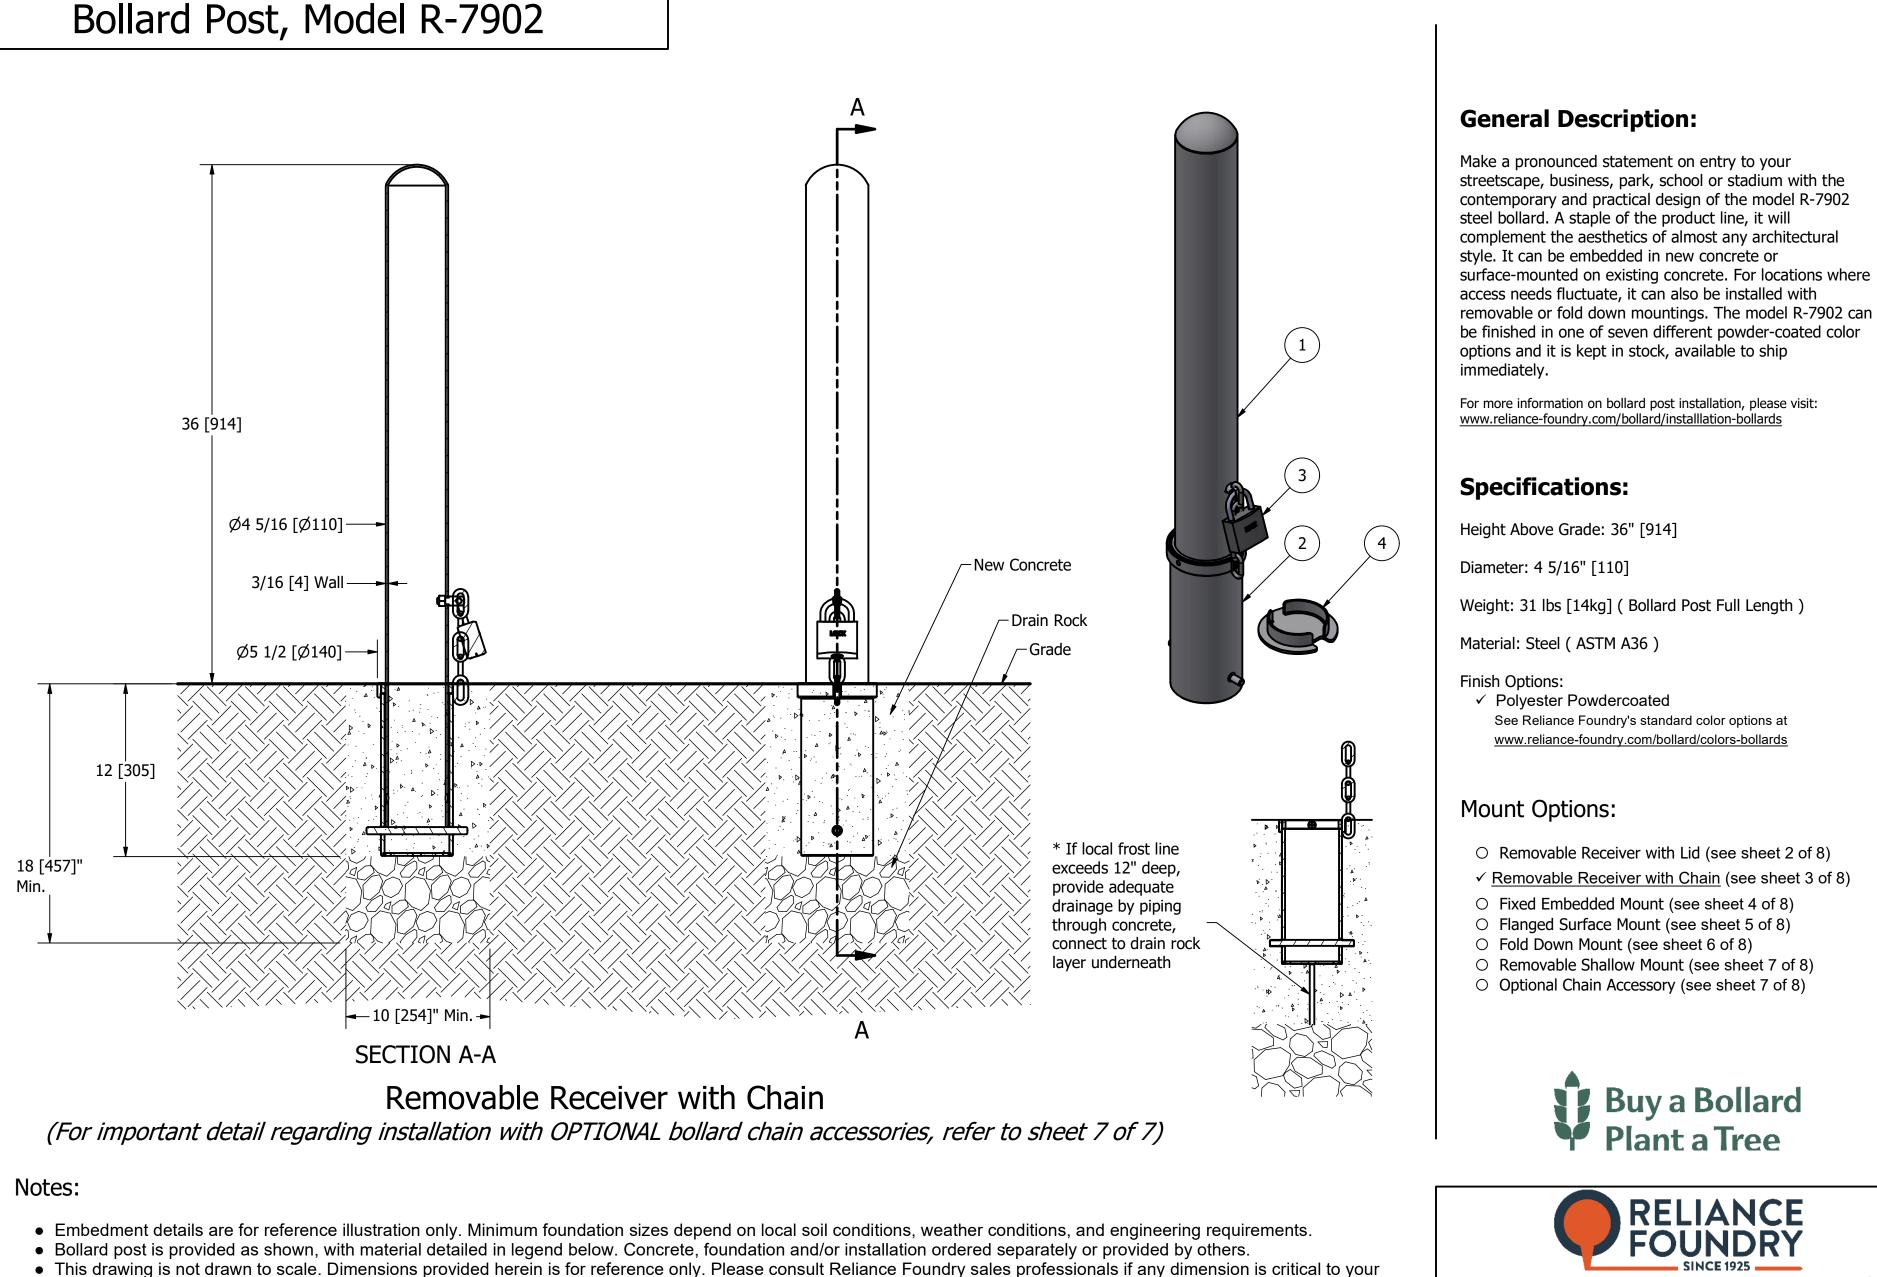

PARTS LIST

DESCRIPTION

Optional Padlock (Brass or Stainless Steel)

Bollard R7902 Removable Assembly

Optional R7902RC Receiver Cover

R7902R Receiver Assembly

RELIANCE **FOUNDRY**

Unit 207, 6450 - 148 Street, Surrey, BC V3S 7G7, Canada 1-888-735-5680 info@reliance-foundry.com www.reliance-foundry.com

TITLE

WEIGHT

31 lbs

16 lbs 5/8 lbs

2 lbs

Bollard Post, Model R-7902

SIZE			DWG NO		REV
			D 7002 Dublic		A04
			R-7902_Public		AU 1
		LINI FS	OTHERWISE SPECIFIED:		
				l a a	
NOT TO	SCALE	DIMS A	RE IN INCHES [MILLIMETERS]	SHEET 3 OF 8	

THIS PLAN DRAWING AND DESIGN ARE, AND AT ALL TIMES REMAIN, THE EXCLUSIVE PROPERTY OF RELIANCE FOUNDRY CO. LTD. COPYRIGHT RESERVED 4

• Reliance Foundry reserves the right to amend design and specifications without prior notice for product improvement.

PART NUMBER

R7902RC Receiver Cover (Optional)

R7902 Removable

Padlock (Optional)

R7902R Receiver

particular installation.

ITEM

QTY

1


MATERIAL


Galvanized Steel, with 304 Stainless Steel Chain

Steel Powder Coated

304 Stainless Steel

Choice of Brass or Stainless Steel

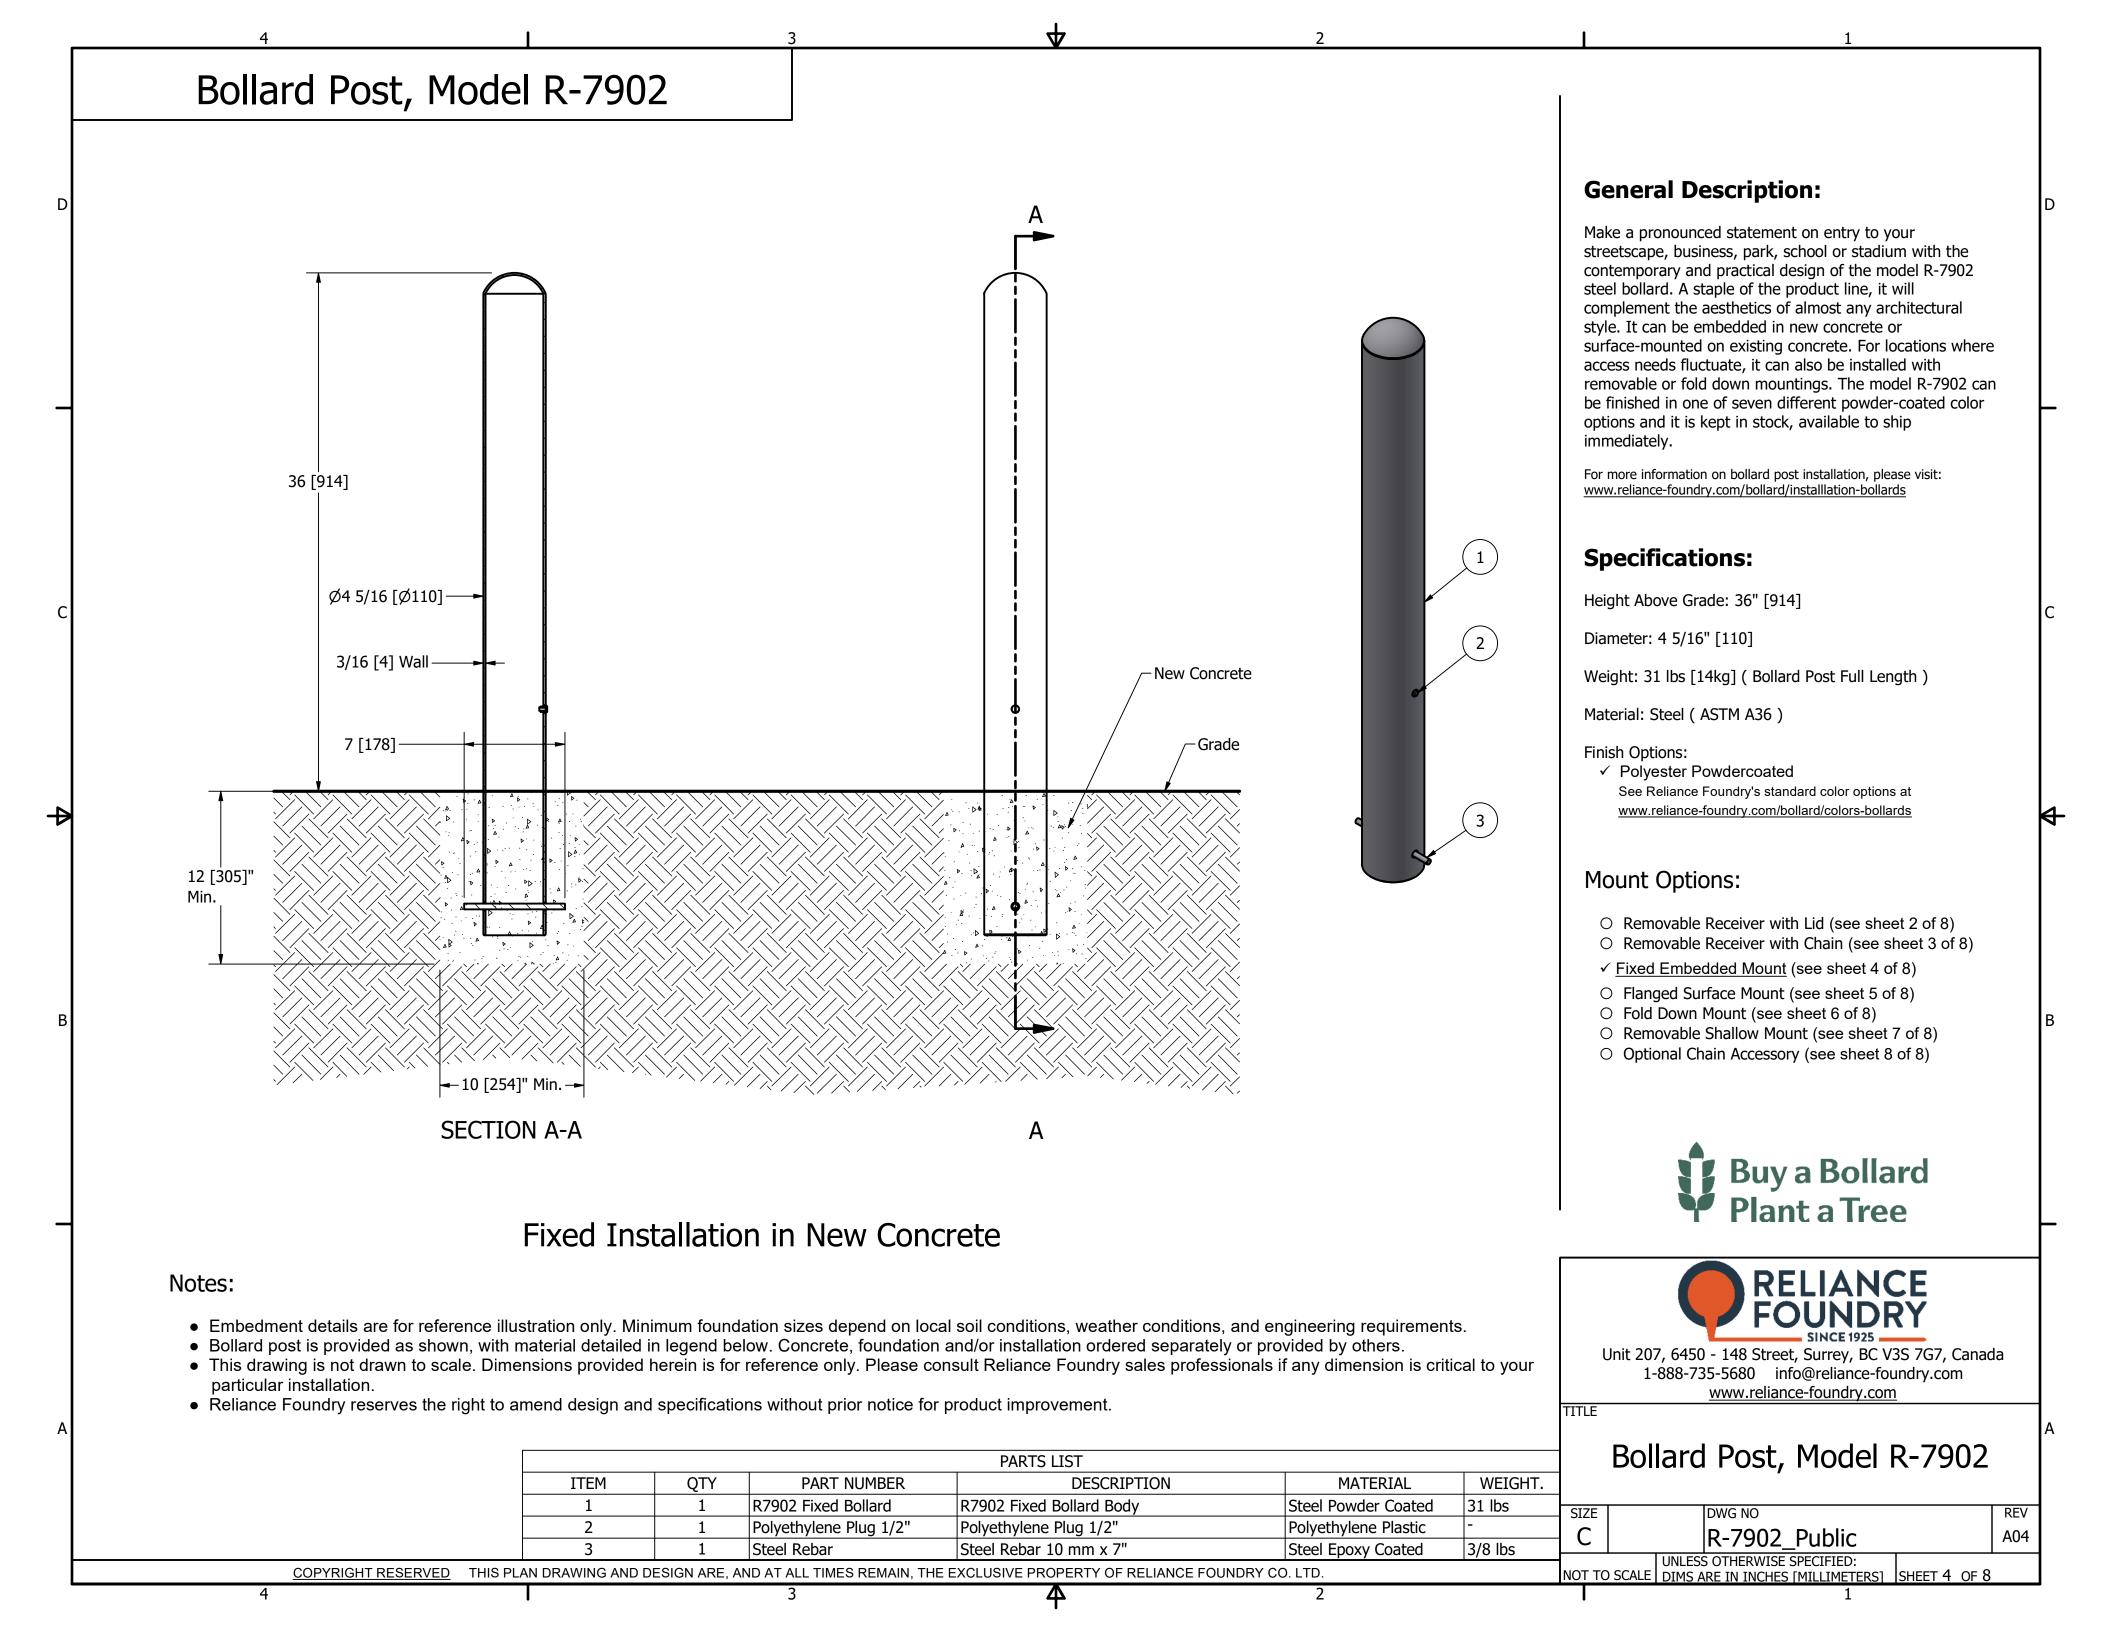

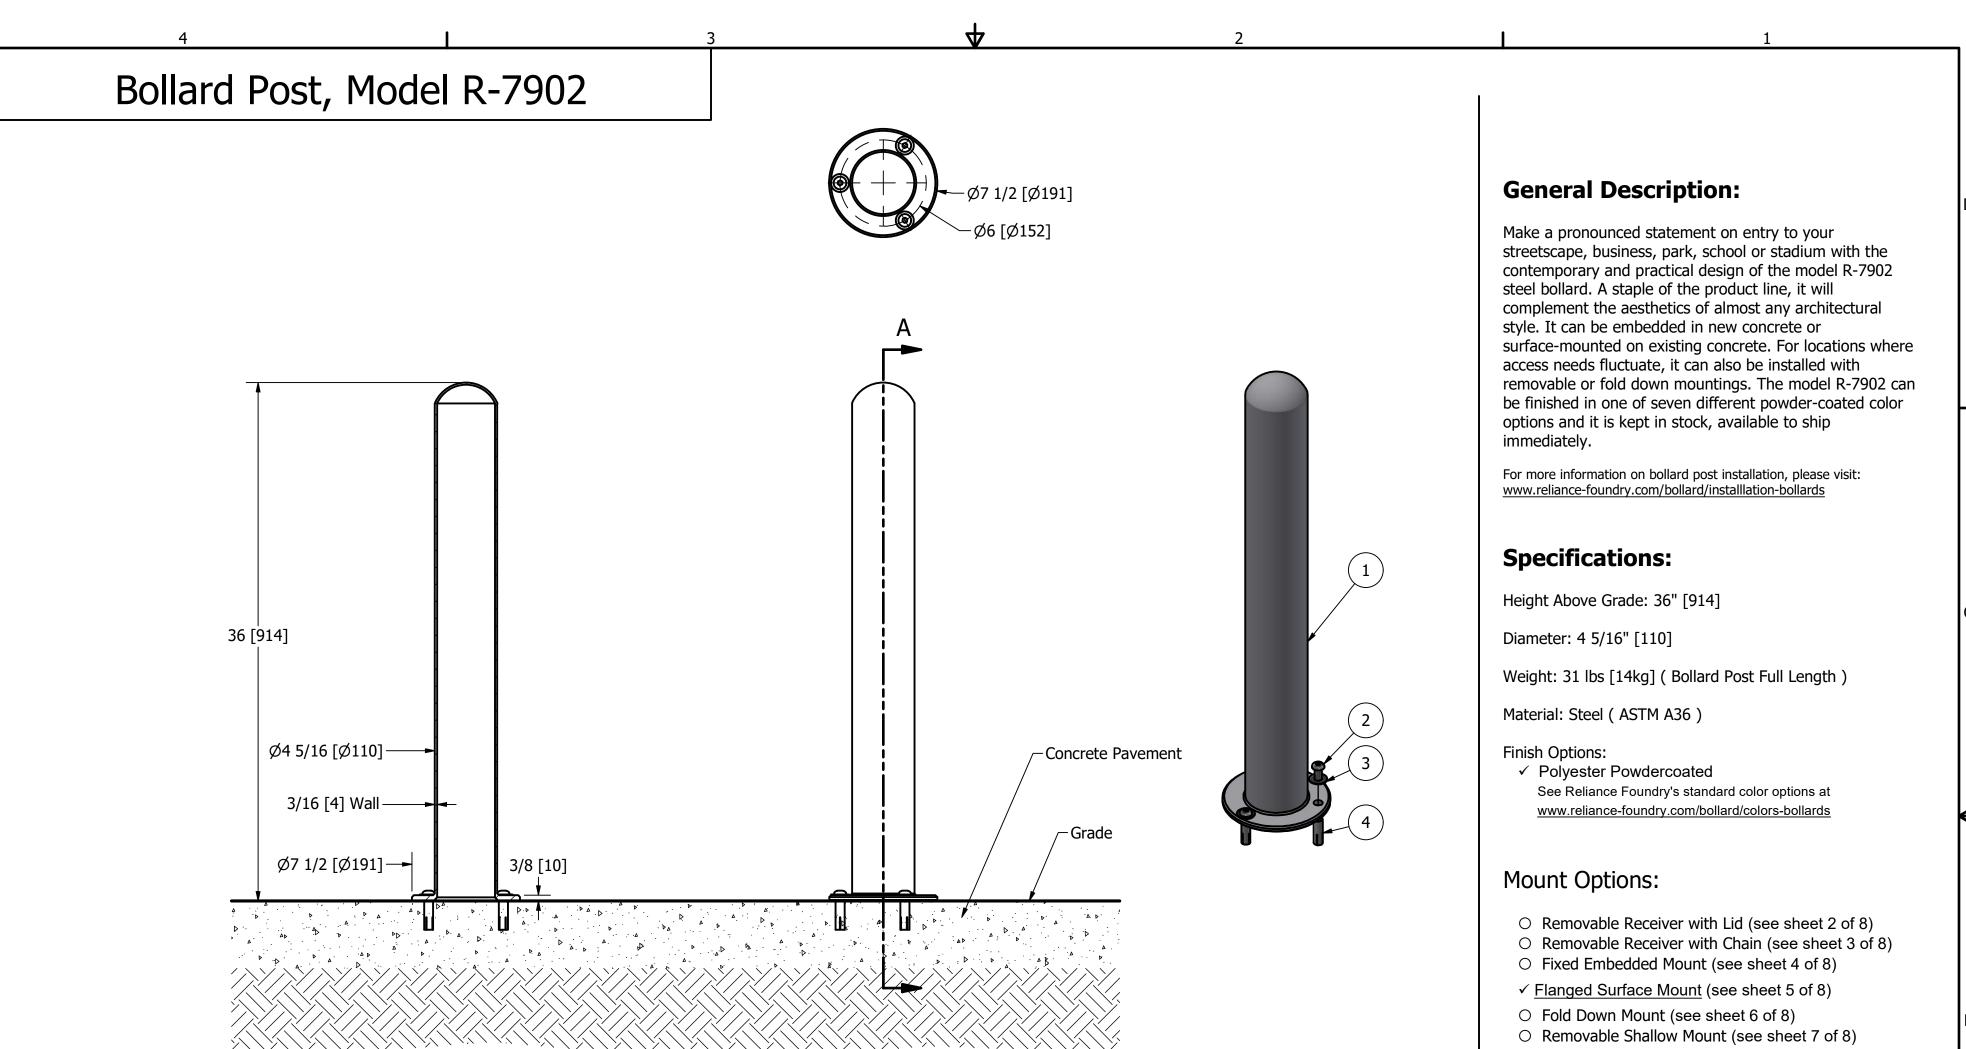

Flanged / Surface Mount

Notes:

- Embedment details are for reference illustration only. Minimum foundation sizes depend on local soil conditions, weather conditions, and engineering requirements.
- Bollard post is provided as shown, with material detailed in legend below. Concrete, foundation and/or installation ordered separately or provided by others.
- This drawing is not drawn to scale. Dimensions provided herein is for reference only. Please consult Reliance Foundry sales professionals if any dimension is critical to your particular installation.
- Reliance Foundry reserves the right to amend design and specifications without prior notice for product improvement.

SECTION A-A

O Optional Chain Accessory (see sheet 8 of 8)





Unit 207, 6450 - 148 Street, Surrey, BC V3S 7G7, Canada 1-888-735-5680 info@reliance-foundry.com www.reliance-foundry.com

TITLE

Bollard Post, Model R-7902


SIZE		DWG NO			REV
С		R-7902_Public			A04
NOT TO	SCALE	 OTHERWISE SPECIFIED: RE IN INCHES [MILLIMETERS]	SHEET 5 O	F 8	

	PARTS LIST							
ITEM	QTY	PART NUMBER	DESCRIPTION	MATERIAL	WEIGHT.			
1	1	R7902 Flanged Bollard	R7902 Flanged Bollard Body	Steel Powder Coated	30 lbs			
2	3	Button Head Bolt 1/2" x 1 1/4"	Hexagon Socket Button Head Cap Bolt 1/2" x 1 1/4" - requires 5/16" hex key	Stainless Steel	1/8 lbs			
3	3	Stainless Steel Washer 1/2"	Stainless Steel Washer 1/2" OD 1 1/4" Thick .05"	Stainless Steel	-			
4	3	Drop-in Concrete Insert 1/2"	Drop-in Concrete Insert 1/2" - requires 5/8" x 2" hole (dia. x depth)	Steel Plated	1/8 lbs			
000	CORVENIENT DESCRIVER. THIS REAL PRAYUNG AND DESCRIVED AT ALL TIMES DEMAND. THE EVOLUSIVE PROPERTY OF RELIANCE FOLINDRY OF LTD.							


COPYRIGHT RESERVED THIS PLAN DRAWING AND DESIGN ARE, AND AT ALL TIMES REMAIN, THE EXCLUSIVE PROPERTY OF RELIANCE FOUNDRY CO. LTD.

3 4 2

1

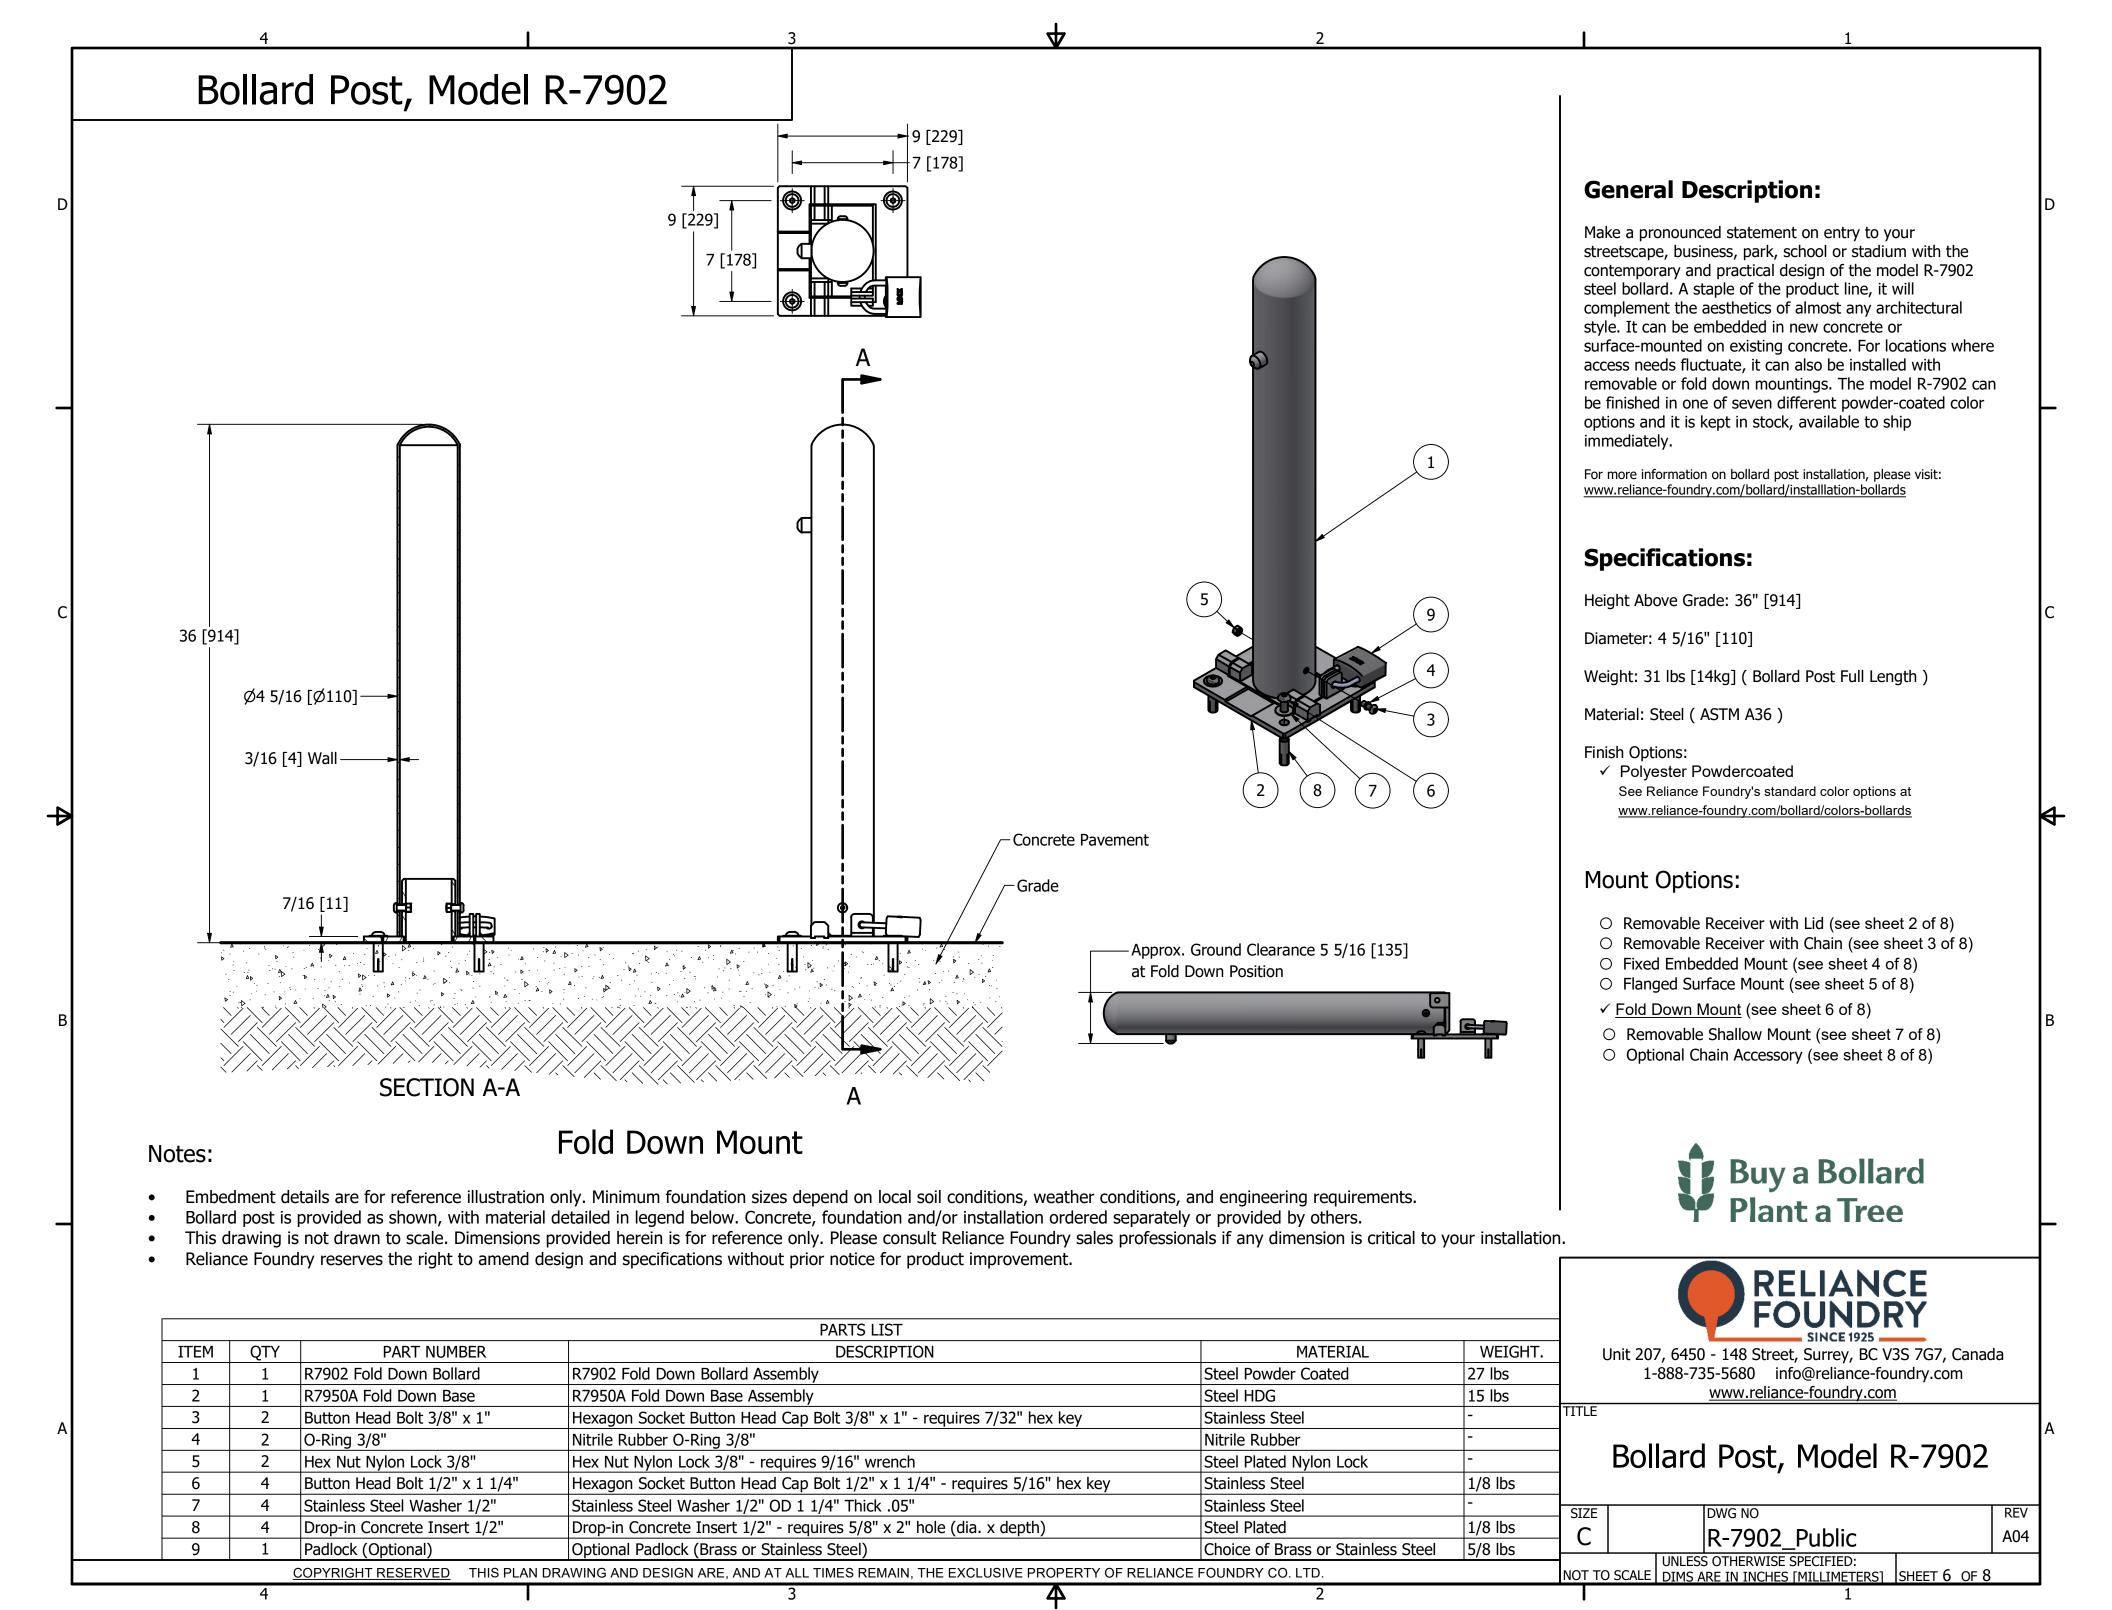

Bollard Post, Model R-7902

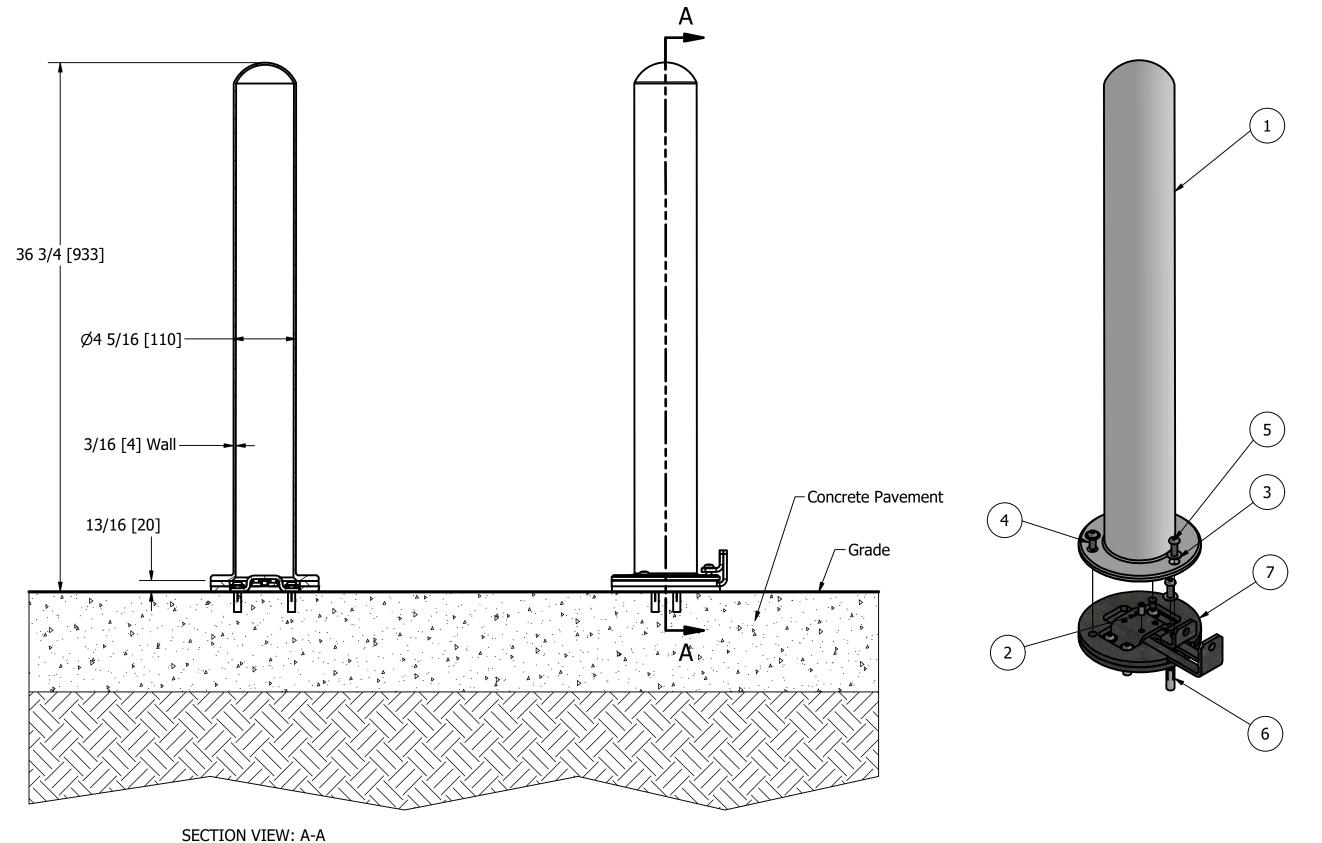

Notes:

- Embedment details are for reference illustration only. Minimum foundation sizes depend on local soil conditions, weather conditions, and engineering requirements.
- Bollard post is provided as shown, with material detailed in legend below. Concrete, foundation and/or installation ordered separately or provided by others.
- This drawing is not drawn to scale. Dimensions provided herein is for reference only. Please consult Reliance Foundry sales professionals if any dimension is critical to your installation.
- Reliance Foundry reserves the right to amend design and specifications without prior notice for product improvement.

General Description:

Make a pronounced statement on entry to your streetscape, business, park, school or stadium with the contemporary and practical design of the model R-7902 steel bollard. A staple of the product line, it will complement the aesthetics of almost any architectural style. It can be embedded in new concrete or surface-mounted on existing concrete. For locations where access needs fluctuate, it can also be installed with removable or fold down mountings. The model R-7902 can be finished in one of seven different powder-coated color options and it is kept in stock, available to ship immediately.

For more information on bollard post installation, please visit: www.reliance-foundry.com/bollard/installlation-bollards

Specifications:

Height Above Grade: 36" [914]

Diameter: 4 5/16" [110]

Weight: 31 lbs [14kg] (Bollard Post Full Length)

Material: Steel (ASTM A36)

Finish Options:

TITLE

✓ Polyester Powdercoated

See Reliance Foundry's standard color options at

www.reliance-foundry.com/bollard/colors-bollards

Mount Options:

- O Removable Receiver with Lid (see sheet 2 of 8)
- O Removable Receiver with Chain (see sheet 3 of 8)
- O Fixed Embedded Mount (see sheet 4 of 8)
- O Flanged Surface Mount (see sheet 5 of 8)
- O Fold Down Mount (see sheet 6 of 8)
- ✓ Removable Shallow Mount (see sheet 7 of 8)
- Optional Chain Accessory (see sheet 8 of 8)





Unit 207, 6450 - 148 Street, Surrey, BC V3S 7G7, Canada 1-888-735-5680 info@reliance-foundry.com

www.reliance-foundry.com

Bollard Post, Model R-7902

SIZE			DWG NO		
С	C		R7902F_R7960R_Public	A04	
NOT TO SCALE			OTHERWISE SPECIFIED: RE IN INCHES [MILLIMETERS] SHEET 7 OF 8		

	PARTS LIST									
ITEM	ITEM QTY PART NUMBER		DESCRIPTION	MATERIAL	WEIGHT					
1	1 1 R7902 Flanged Bollard I		R7902 Flanged Bollard Body	Steel Powder Coated	30 lbs					
2	4	Hexagon Socket Set Screw 3/8" x 3/4"	Hexagon Socket Set Screw 3/8" x 3/4" - requires 3/16" hex key	Stainless Steel	-					
3	7	Stainless Steel Washer 3/8"	Stainless Steel Washer 3/8" OD 7/8" Thick .05"	Stainless Steel	-					
4	6	Button Head Bolt 3/8" x 1"	Hexagon Socket Button Head Cap Bolt 3/8" x 1" - requires 7/32" hex key	Stainless Steel	-					
5	1	Tamper-resistant Button Head Button 3/8" x 1"	Hexagon Socket Button Head Cap Bolt 3/8" x 1" - requires 7/32" hex key	Stainless Steel	-					
6	4	Drop-in Concrete Insert 3/8"	Drop-in Concrete Insert 3/8" - requires 1/2" x 1 1/2" hole (dia. x depth)	Steel Plated	-					
7	1	R7960R	Shallow Removable Mount	Steel Plated	8 lbs					
COPVRI	COPVRIGHT RESERVED. THIS PLAN DRAWING AND DESIGN ARE AND AT ALL TIMES REMAIN. THE EXCLUSIVE PROPERTY OF RELIANCE FOLINDRY COLLTD									

COPYRIGHT RESERVED THIS PLAN DRAWING AND DESIGN ARE, AND AT ALL TIMES REMAIN, THE EXCLUSIVE PROPERTY OF RELIANCE FOUNDRY CO. LTD.

3 2

