


Photometric Mapping: R-9836 Lighted Bollard

PRODUCT SPECIFICATIONS:

Light Type	Lighting Colour (K)	Luminous Flux (lumens)	B. U. G. Rating
LED	5700	89.9	B1-U2-G0


INTENSITY DISTRIBUTION DIAGRAM IN C PLANS

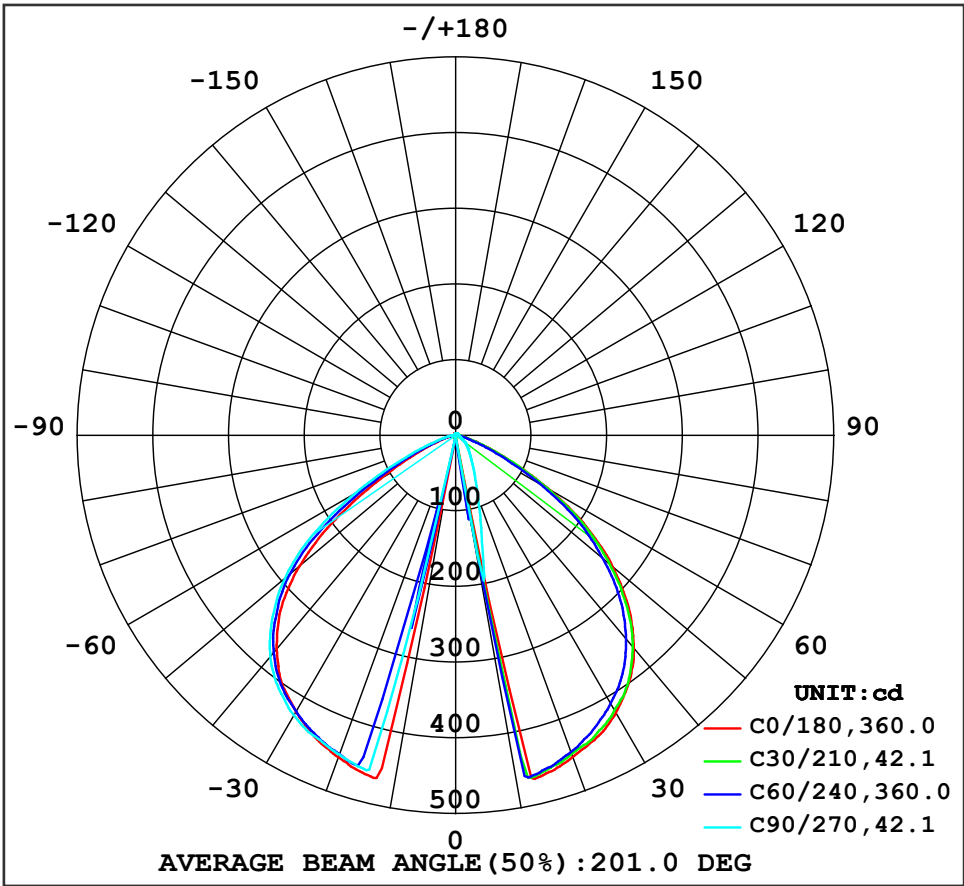

C Range: 0 - 360DEG C Interval: 10.0DEG Test Speed: HIGH Temperature:25.3℃ Operators:DAMIN Test Date:2024-05-27	γ Range: 0 - 180DEG γ Interval: 0.5DEG Test System:EVERFINE GO-2000B_V1 SYSTEM V2.00.464 Humidity:65.0% Test Distance:9.780m [K=1.0000] Remarks:
--	---

Photometric Mapping: R-9836 Lighted Bollard

ISO-ILLUMINANCE PLOT:

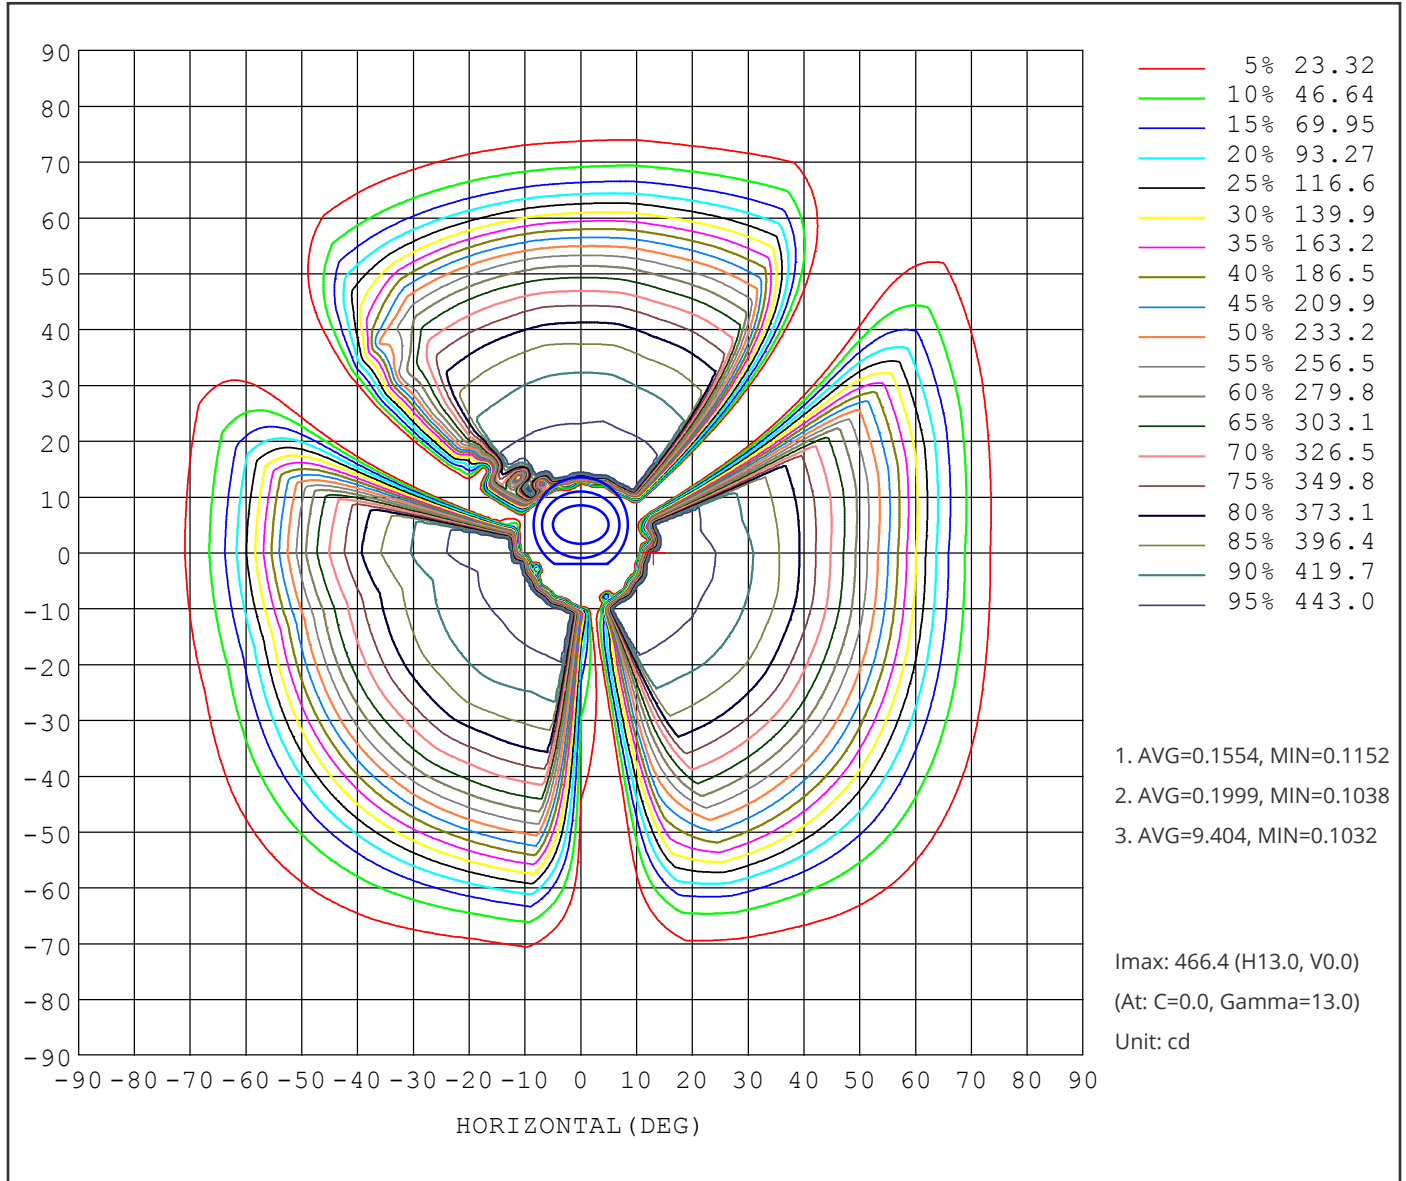

C Range: 0 - 360DEG
C Interval: 10.0DEG
Test Speed: HIGH
Temperature: 25.3°C
Operators: DAMIN
Test Date: 2024-05-27

γ Range: 0 - 180DEG
γ Interval: 0.5DEG
Test System: EVERFINE GO-2000B_V1 SYSTEM V2.00.464
Humidity: 65.0%
Test Distance: 9.780m [K=1.0000]
Remarks: